

HXL INFRARED QUARTZ HALOGEN HEATERS


What is a HXL Infrared Quartz Halogen Heater?

An extra large shortwave heater designed to heat people directly not surrounding air. These heaters are designed for high level mounting in industrial applications and can be used to spot heat a specific area or to space heat an entire premises. HXL heaters are ideal when mounting options are limited by obstacles such as gantry cranes or mezzanines.



9kW

13.5kW/18kW



- Instantly effective
- Replaceable halogen lamp with 7000 hours average operating life
- Suspension hooks supplied as standard
- Can be wall mounted requires HXL-WMK wall mount kit
- 1m power lead (2-core and earth)
- Can be mounted up as high as 9m

Energy Saving Tip

Control with a TS-8 run down timer and a contactor to avoid heating an unoccupied area.



Heaters

Model	kW	Finish	Lamp Glow	Number of Lamps
HXL-90B	9kW	Black	Gold lamp (red glow)	6
HXL-135B	13.5kW	Black	Gold lamp (red glow)	9
HXL-180B	18kW	Black	Gold lamp (red glow)	9

Technical

NA - Jol	V (- 1) -		Dimensions (mm)			
Model	Volts	Н	W	D	Weight (kg)	
HXL-90B	400/3N	626	792	100	13	
HXL-135B	400/3N	626	1200	100	18.5	
HXL-180B	400/3N	626	1200	100	18.5	

Accessories

Model	Description	Details
HXL-WMX	Wall mounting kit (one per heater)	-
TS-8	Push button timer (7.2kW max) Light grey finish (requires contactor)	Page 125
TS-8B	Push button timer (7.2kW max) Black finish (requires contactor)	Page 125
CON-32	Contactor 32A 3-pole (HXL-90B)	Page 129
CON-50	Contactor 50A 3-pole (HXL-135B)	Page 129
CON-80	Contactor 80A 3-pole (HXL-180B)	Page 129
ENCL-D	Enclosure for CON-32 or CON-50	Page 129

Replacement Lamps

Model	Description	Details
HXL-90B	RL15GF	-
HXL-135B	RL15GF	-
HXL-180B	RL20GF	-

Required W/m²

Purpose of heater	W/m² density required
Spot heat a specific area (e.g. a workstation)	250-300
Heat entire area (e.g. entire warehouse)	150-200


Area Covered (overhead mounted)

		•		
Model	H (m)	X (m)	Y (m)	m²
6 lamp heater	6	8.2	5.1	41.8
6 lamp heater	7	9.5	6	57
6 lamp heater	8	10.6	6.8	72.1
9 lamp heater	6	9.5	5.9	56.1
9 lamp heater	7	10.9	6.8	74.1
9 lamp heater	8	12.4	7.6	94.2
9 lamp heater	9	13.8	8.5	117.3


Area Covered (wall mounted)


			•		
Model	H (m)	X (m)	Y (m)	Z (m)	m²
6 lamp heater	4.5	6.7	5.4	8.6	41.3
6 lamp heater	5	7.1	5.9	10.4	51.6
6 lamp heater	6	8.4	6.9	12.1	70.7
9 lamp heater	5	8.1	5.8	11.6	57.1
9 lamp heater	6	9.7	6.8	13.6	79.2
9 lamp heater	7	11.2	7.9	14.6	101.9
9 lamp heater	8	12.7	8.8	16.5	128.5

Overhead mounted



Wall mounted



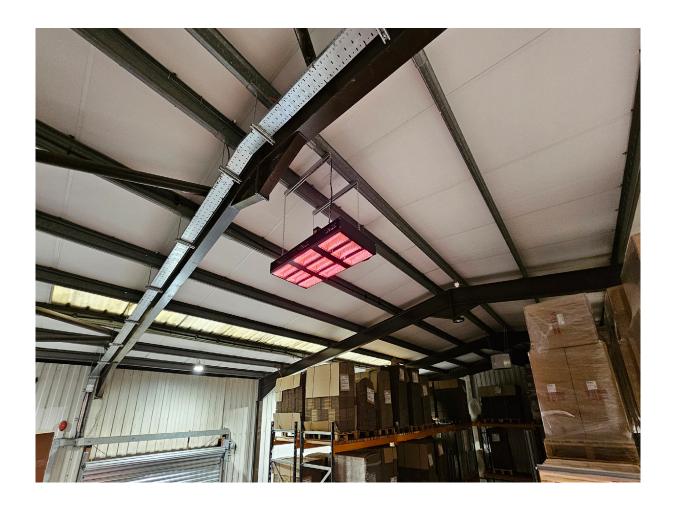

Warehouse

 ${\bf Location: Northampton, Northamptonshire} \\ {\bf Installed: 1 \times 13.5 kW \ Infrared \ Quartz \ Halogen \ Heater \ at 6.5 \ metres} \\$