


SystemX SURFACE MOUNT HEATERS

What is a **System**XSurface Mount Ceiling Heater?

A robust heater that's designed to space heat larger commercial premises with solid ceilings. Multiple SystemX surface mount ceiling heaters can be daisy chained from one simple to use controller as per diagram below. Control connections are all made with Cat5 cable making for a quick, error free install.

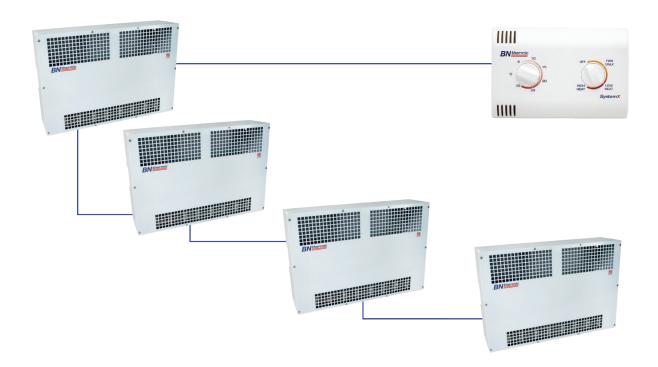

Key Features

- · Control up to 12 heaters from a single point
- Compact design only 152mm high
- Keyhole screw fixing or suspend from drop rods (M6 threaded holes provided)
- All control connections by Cat5 cable for super quick error-free installation
- Controllers do not require their own 230V supply
- BMS compatible using CX-BMS module
- Can be controlled in a group with any other style of SystemX heater



Energy Saving Tip

Control with a 7-day programmable thermostat to keep your running costs to an absolute minimum.



SystemX Surface Mount Ceiling Heaters

Model	kW	Finish
XS-30	3.0	White
XS-30B	3.0	Black
XS-45	4.5	White
XS-60	6.0	White

SystemX Control Components

	Description	Model	Details
	Controller with thermostat On/off/low/high/fan only settings	CX1	Page 123
Novement of the second of the	Controller with tamper resistant thermostat On/off/low/high/fan only settings	CX2	Page 123
IIIII BNOWNESS TO THE STATE OF THE STATE O	Controller - manual On/off/low/high/fan only settings	CX3	Page 123
Decimal decimal and the second decimal decimal decimal and the second decimal	Controller with digital programmable thermostat	CX6	Page 123
AN Institute	BMS module for use with volt-free signal	CX-BMS	Page 123
11 1 1 1 1 1 1 1 1 1	Optional remote sensor for use with CX1, CX2 or CX6 controllers	CXS	Page 123
	Cat5 cable terminated 5m	DX05	-
	Cat5 cable terminated 10m	DX10	-
	Cat5 cable terminated 10m (black)	DX10B	-
	Cat5 cable terminated 20m	DX20	-
	Cat5 cable joiner	JX1	-

Technical

kW		Volts	Airflow dB*@2r	dB*@2m	Recommended Mounting Height(m)		Dimensions(mm)			Weight (kg)
High	Low		voits (m³/h)		Min	Max	W	D	Н	
3.0	2.0	230	245	56	2.4	3.0	575	392	152	8.0
4.5	2.25	230	345	59	3.0	4.5	575	392	152	11.0
6.0	4.0	230	490	58	2.4	3.0	575	592	152	12.5

*Noise levels are factory tested not laboratory tested



Stores Area

Location: Swansea, Wales

Installed: 2 x 3kW Surface Mount Fan Heater in black finish



The Rural Auction Centre

Location: Milnthorpe, Cumbria Installed: 7 x 6kW Surface Mount Ceiling Heaters